


JAMICON

(PE10AA4)

ELECTROLYTIC CAPACITOR SPECIFICATION

CUSTOMER		ROPLA	
CODE	YOUR		NO. T0605004-5
	OUR	WLR2R2M2AD11M	DATE 2006/5/5
LOT NO.			POLARITY
CASE SIZE		5 × 11	QUANTITY 0 PCS
SERIES	WLR	TYPE R	SAFETY VENT
RATED VALUE		2.2 uF 100 v	

D	5 Φ	L'	≤L+1.5
D'	<D+0.5	F	2.0
d	0.5 Φ		

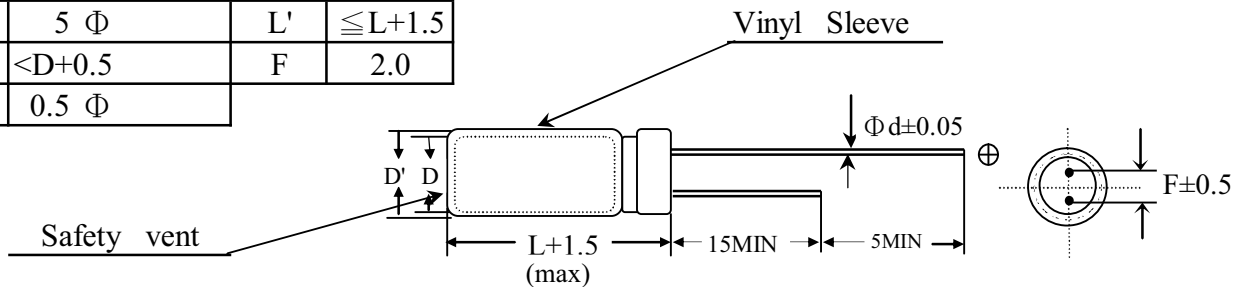

Item	Characteristics	
Operation temperature range	- 55 °C	+ 105 °C
Capacitance Tolerance	- 20 %	+ 20 %
Surge Voltage	125 VDC	
Leakage Current	I ≤ 3 (u A) Whichever is greater after 3 minutes	
Dissipation Factor	≤ 8 (%)	120Hz 20 °C
E.S.R.	< (Ω)	120Hz 20 °C
Ripple Current	< 80 (m A)	100KHz 105 °C
IMP.	< 1.511 (Ω)	100KHz 20 °C
Low Temperature Stability	Impedance Ratio At 120Hz	
	Z-25°C / Z+20°C	2 MAX
Load Test	After 1000 Hrs At 105 °C	
	Capacitance Change	≤± 20 % of initial value
	D.F.(tan δ)	≤ 200 % of initial specified value
	Leakage Current	≤ initial specified value
Out Look	Should be without any change	
Terminal Strength	Pull Test	0.5 kg 10±1 sec
	Bend Test	0.25 kg 2 cycle
Soldering	240±2°C	Soldering must covered
	3±0.5sec	more than 95%
Storage Temperature	- 55 °C	+ 105 °C

TEST FREQ.:120Hz	TEST TEMP:20°C	REFERENCE STANDARD: JIS C5102
------------------	----------------	-------------------------------

SU ZHOU KAIMEI ELECTRONIC LTD.

CHECKED

課長
06.05.05
李奎

DESIGNED

技術部
06.05.05
徐燕霞

SE410-28A