



Grey Terminals

Grey Industrial Terminals



Technical Data

	AV/JXB-2.5	AV/JXB-4	AV/JXB-6	AV/JXB-10	AV/JXB-16	AV/JXB-35	AV/JXB-70
Width/Thickness/Height (mm)	40/6/40.5	40/6.5/45.5	40/8/46	40.2/10/46	51/12/52	59/18/62	76/22/78.3
Bolt Diameter (mm)	M2.5	M3	M3.5	M4	M4	M6	M6
Voltage (V)	800	800	800	800	800	800	750
Current (A)	24	32	41	57	76	125	192
Cross Sectional Area (mm²)	2.5	4	6	10	16	35	70
Rigid Conductor Range (mm²)	0.5 - 6	0.5 - 6	0.5 - 10	1.5 - 16	2.5 - 16	6 - 35	10 - 70
Flexible Conductor Range (mm²)	1.5 - 4	1.5 - 4	1.5 - 10	1.5 - 16	2.5 - 16	10 - 35	10 - 70
Standard	IEC60947-7-1						

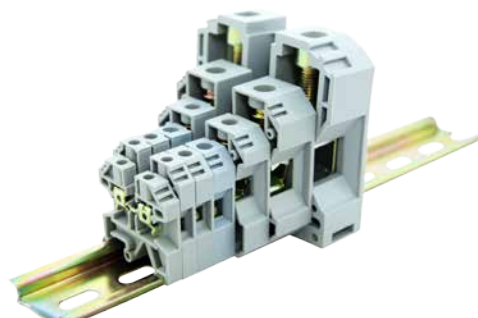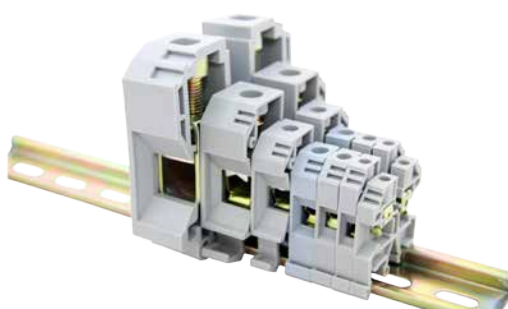

Ordering Data

Grey Terminal 2.5mm	AV/JXB-2.5
Grey Terminal 4mm	AV/JXB-4
Grey Terminal 6mm	AV/JXB-6
Grey Terminal 10mm	AV/JXB-10
Grey Terminal 16mm	AV/JXB-16
Grey Terminal 35mm	AV/JXB-35
Grey Terminal 70mm	AV/JXB-70
