

# Thermostat KSD301




## SPECIFICATION

- Electrical Rating : 16A 125V AC (Resistive Load)  
10A 250V AC (Resistive Load)  
16A 250V AC (Resistive Load)
- Operating Temp : 50 ~ 175°C (UL.CUL 205°C)
- Differential : 10~30K (15K Standard)
- Temp. Tolerance : Operating Temp.±3K±5K
- Heat Durability : 220°C Max. (PPS)
- Circuit Resistance : 50mΩ Max.
- Insulation Resistance : 100MΩ Min.at DC500V
- Dielectric Strength : AC 1000V for One Minute.  
or AC 1800V for One Second.
- Operating Life : 100000 Cycles (16A 125V/10A 250V AC)  
10000 Cycles (16A 250V AC)



## HOW TO ORDER

### MODEL CODE (FULL CODE)

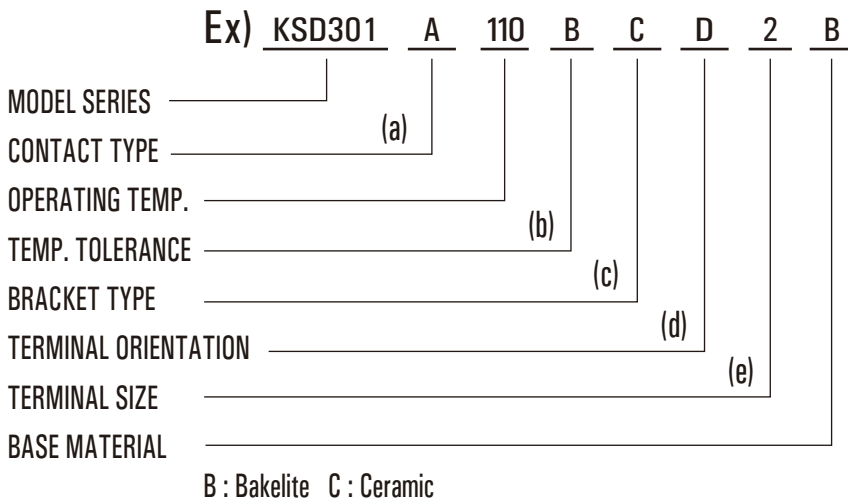

### (a) CONTACT TYPE :

A = Contact Opens When Temperature Rises to Set Point (Normally Closed)



B = Contact Closes When Temperature Rises to Set Point (Normally Open)



M = Manual Reset

### (b) TEMP. TOLERANCE : (\*=STANDARD)

Grade	A	*B
Action ± °C	3	5
Reset ± °C	4	8

• The Grade of Temp. Tolerance is "A", When The Operating Temp. is Less Than 105°C.


• The Grade of Temp. Tolerance is "B", When The Operating Temp. is Over 106°C.

(c) BRACKET TYPE :

● FIXED BRACKET

\* STAINLESS STEEL CAP : D,DL,V,T TYPE


SCREW TYPE : M4x0.7 L:6mm (STD)  
M5x0.8 L:6mm (STD)  
#6-32UNC  
#8-32UNC

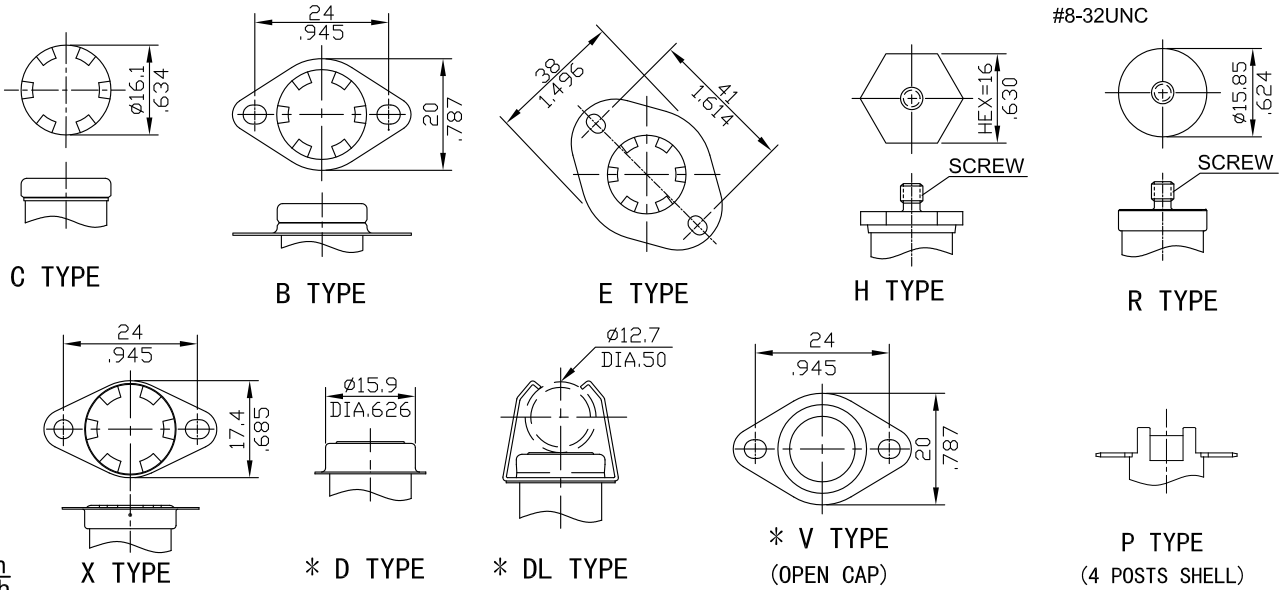

mm  
inch


● LOOSE BRACKET

\* STAINLESS STEEL CAP : U TYPE

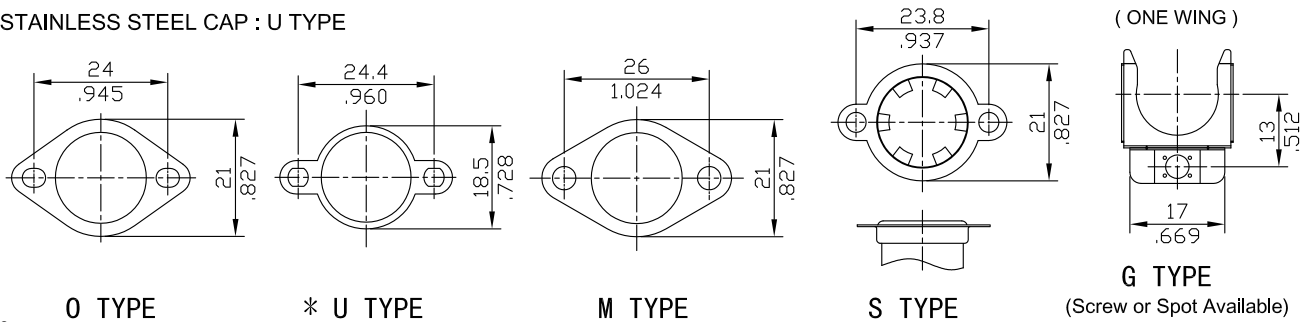


mm  
inch

(d) TERMINAL ORIENTATION:

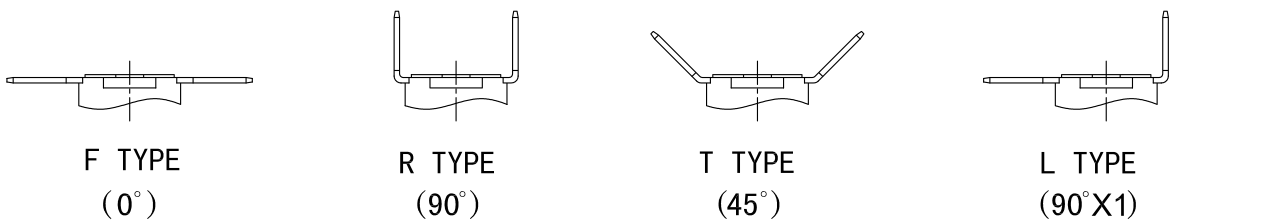


(e) TERMINAL SIZE:

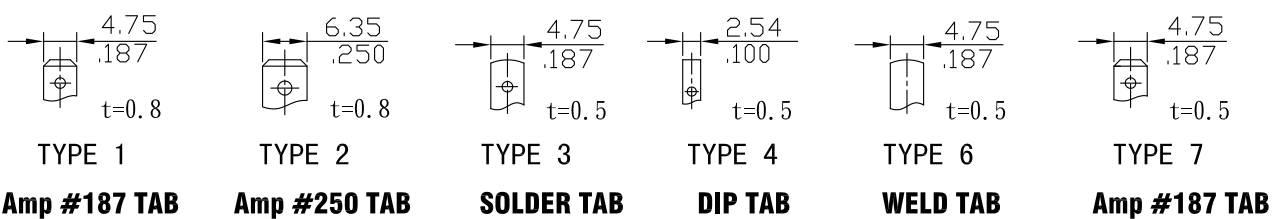


mm  
inch


KSD301A-CF2

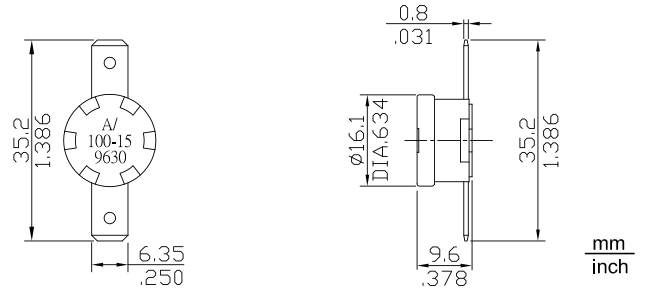


KSD301A-CR1-OS(ONE SHOT)

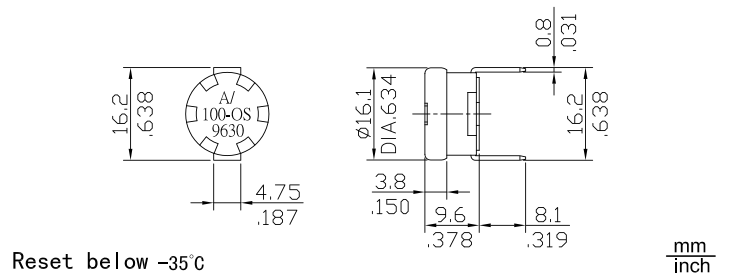


KSD301A-SF2(LOOSE BRACKET)

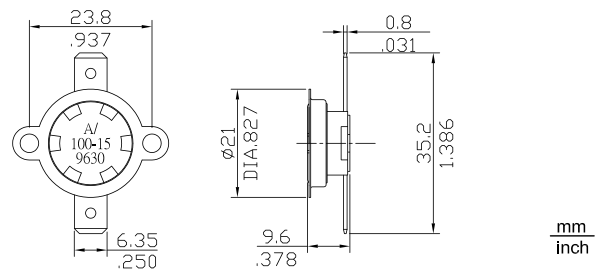

KSD301A-PF2(4-POST)

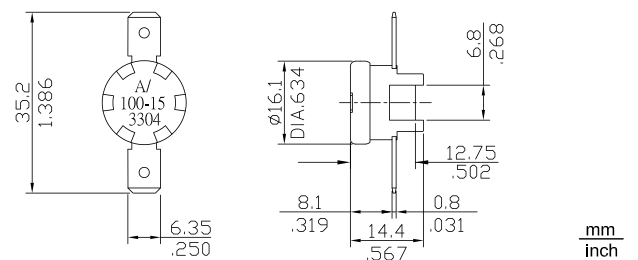


KSD301A-XF2(FIX BRACKET)

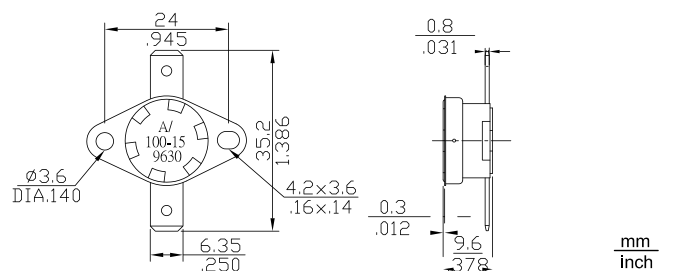

# Thermostat KSD301




## KSD301M-RF2

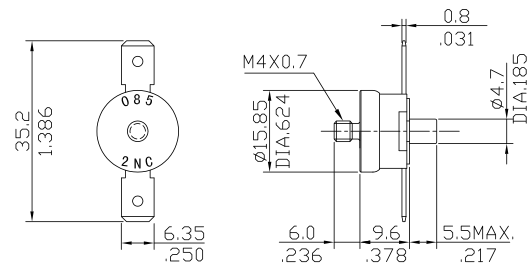


mm  
inch

## KSD301A-HF1

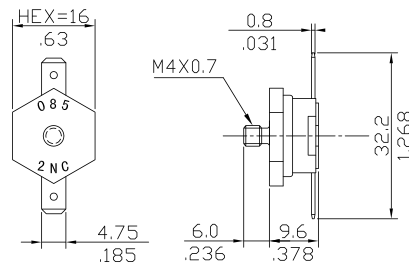


mm  
inch

## KSD301A-HR1

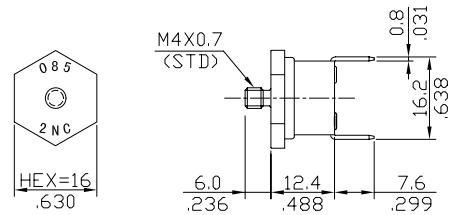


mm  
inch

## KSD301A-RF2-A

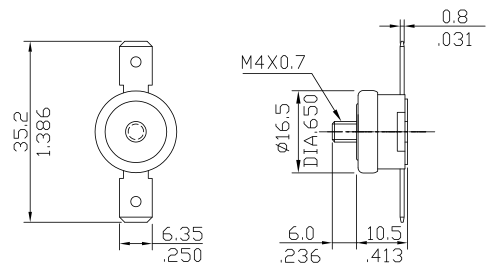


mm  
inch

## KSD301A-RF2-A

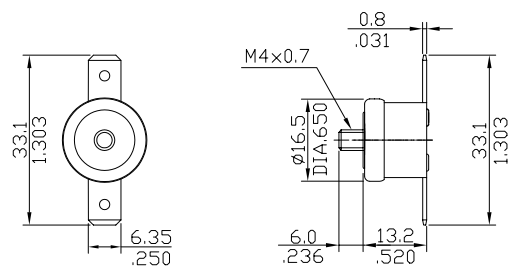


mm  
inch

## KSD301A-BF2

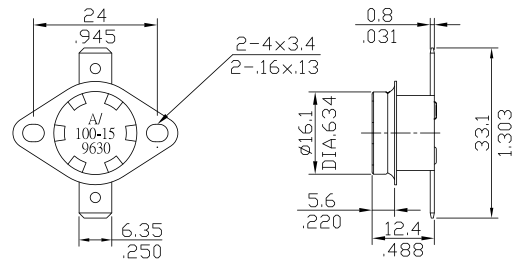


mm  
inch

## KSD301B-CF2

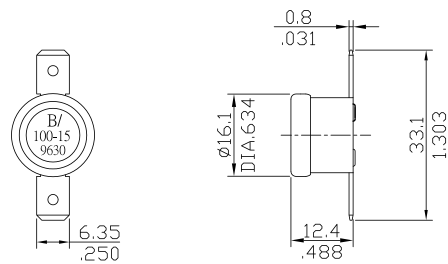

mm  
inch

## KSD301M-DF2

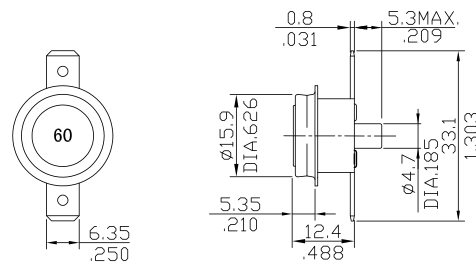


mm  
inch

## KSD301A-CR4




(FOR PCB)

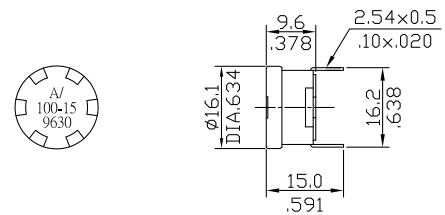


mm  
inch

## KSD301A-DR2-E

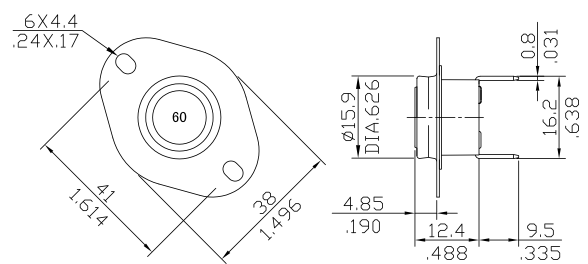


mm  
inch

**KSD301A-SF2-U**

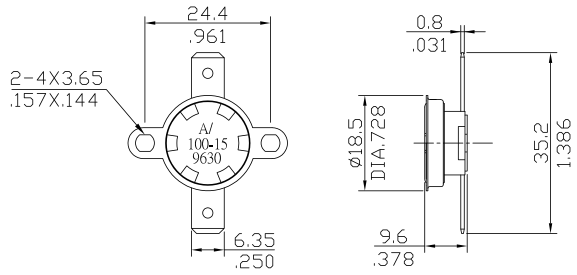


mm  
inch

**KSD301A-SF2(LOOSE BRACKET)**

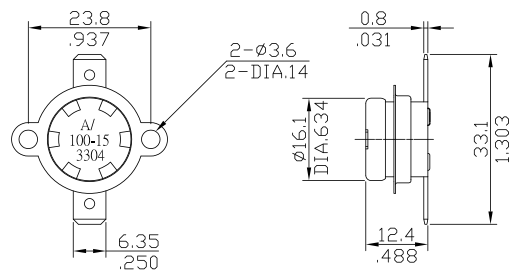


mm  
inch

**KSD301A-XF1(FIX BRACKET)**

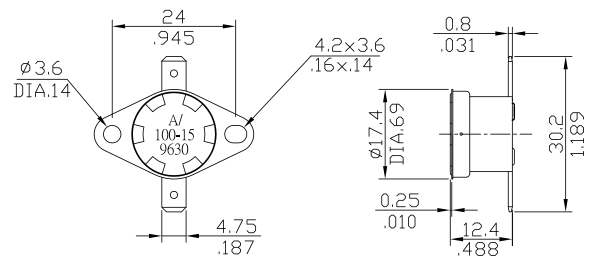

mm  
inch

**KSD301A-BF2-V(OPEN CAP)**

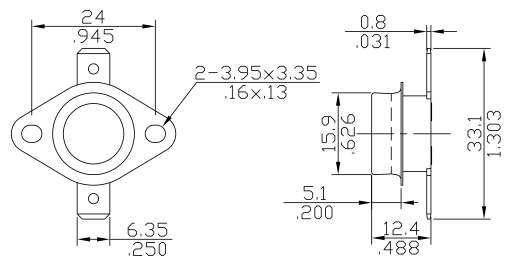

mm  
inch